



TECHNICAL EXCELLENCE. SINCE 1929.

INDUSTRIAL CABLE REELS SERIES 1400

ART. 1435

Length (m)
20

Number of conductors
4 G

Cross-section (mm²)
2.5

Wound cable capacity (@20°C)
7,0 KW @ 400V


**IP65**EN 61242
EN 60335-1
EN 61316**CE**2014/35/UE
2006/42/CE
2011/65/UE

TECHNICAL DATA

Article	Cable length (m)	Reel cable length (m)	Cut length (m)	Number of conductors	Cross-section (mm ²)	Wound cable capacity (@20°C)	Unwound cable capacity (@20°C)	Cable diameter (mm)	Thermal switch	Cable type
1435	20	18	2	4 G	2.5	7,0 KW @ 400V	10 KW @ 400V	11	NO	PVC

Please note: The images are for illustrative and explanatory purposes only

OVERALL DIMENSIONS

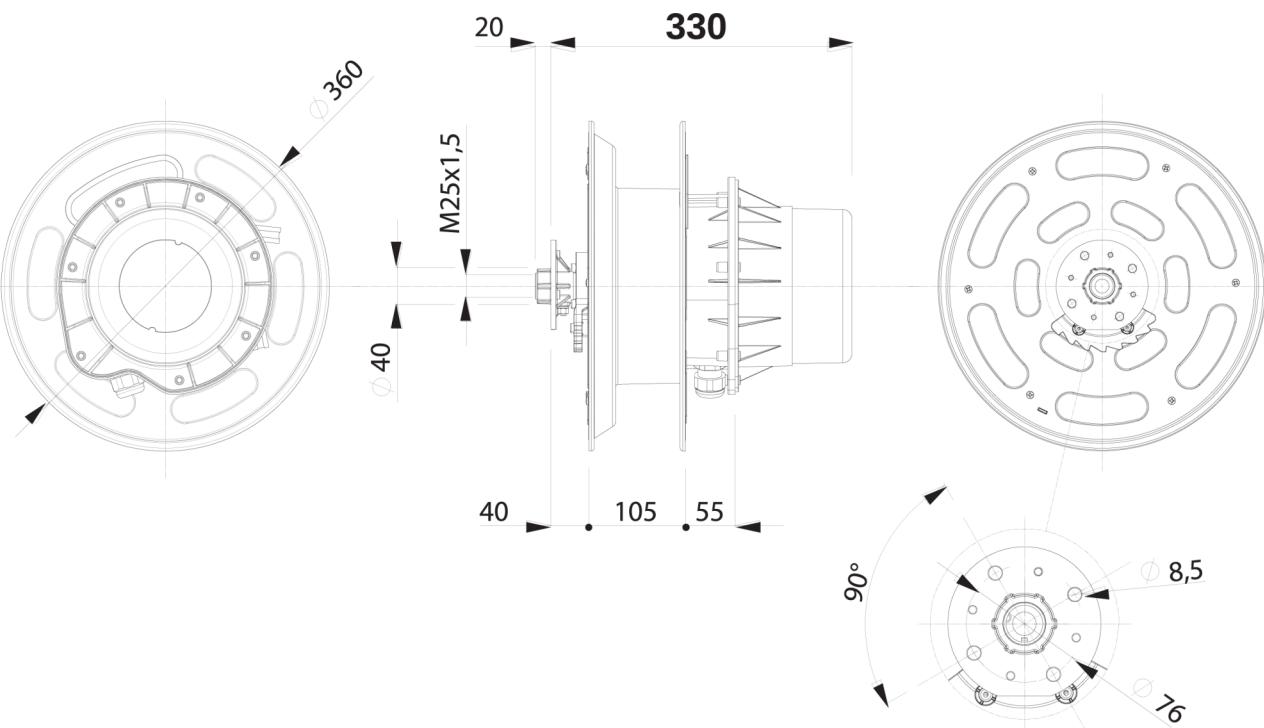


Technical features

- Steel structure with epoxy and technopolymer painting.
- Side fixing flange in aluminum.
- Collectors with 20 - 50 - 100A capacity.
- Long lasting steel spring.
- Degree of protection IP65.
- Supplied without cable or with cable H05 WV-F and H07 RN-F.
- Suitable for rewinding cables from 1 to 12 conductors.
- Ambient temperature of use: -5 ° C / + 50 ° C.
- Maximum rewind speed 30 m / min.
- Collector insulation voltage 2.5 KV.


Cable reel supplied without bracket, without cable guide entry and without detent. These accessories can be purchased separately.

OPTIONAL
ACCESSORIES AND
SPARE PARTS**ART. 1405**

Swivel bracket

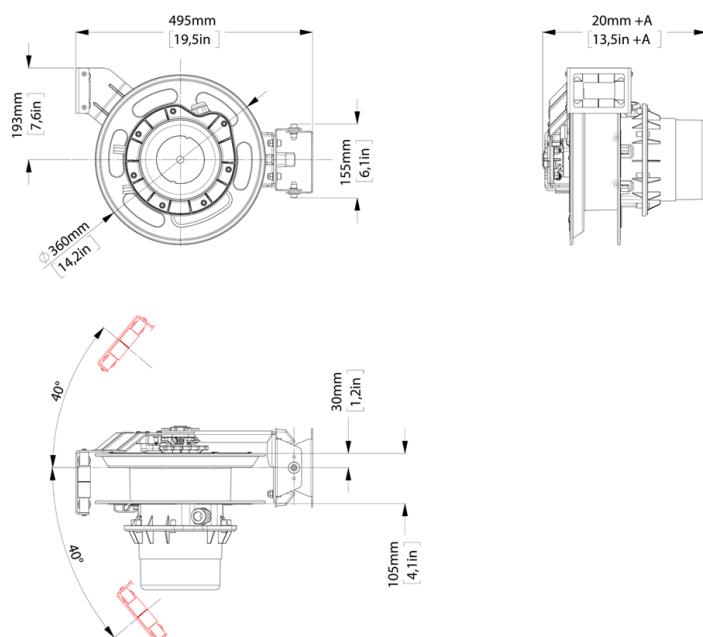

Please note: The images are for illustrative and explanatory purposes only

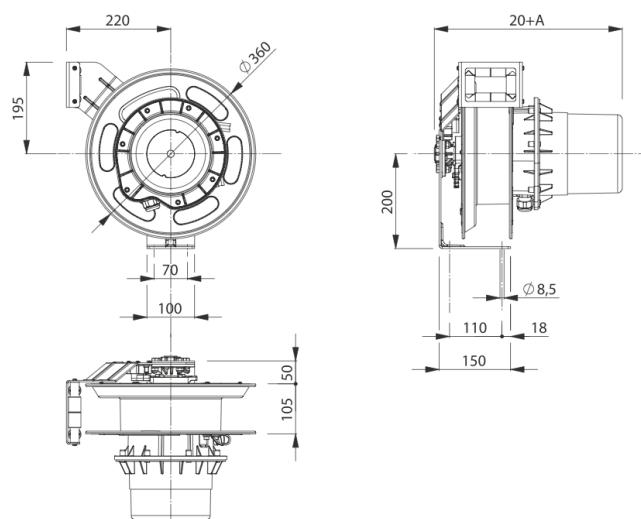
OPTIONAL
ACCESSORIES AND
SPARE PARTS**ART. 1403**Fixed bracket
For wall, floor or ceiling fixing.

Please note: The images are for illustrative and explanatory purposes only

OPTIONAL
ACCESSORIES AND
SPARE PARTS

ART. 1406

Arm with cable guide mouth
• Complete with stop tooth.

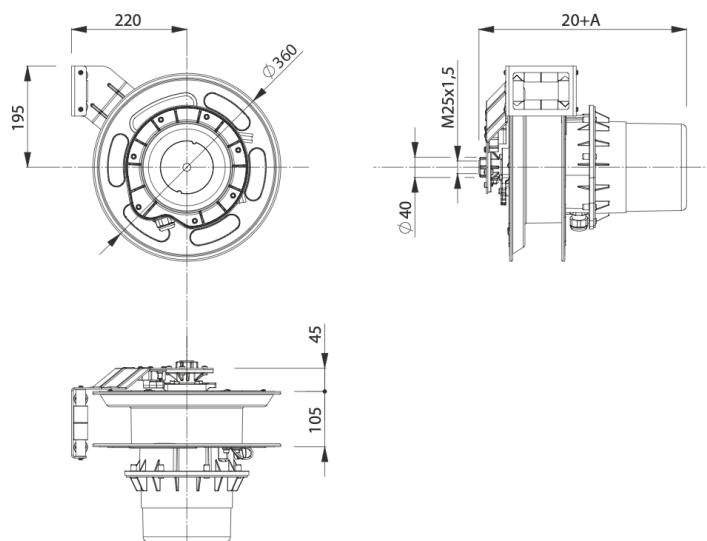

Please note: The images are for illustrative and explanatory purposes only