

**INDUSTRIAL CABLE
 REELS
 SERIE 7000**


ART. 7325 RNF

Length (m)
19

Number of conductors
3 G

Cross-section (mm²)
2.5


Wound cable capacity (@20°C)
2,0 KW @ 230V



TECHNICAL DATA

Article	Cable length (m)	Reel cable length (m)	Cut length (m)	Number of conductors	Cross-section (mm ²)	Wound cable capacity (@20°C)	Unwound cable capacity (@20°C)	Cable diameter (mm)	Thermal switch	V max	Cable type
7325 RNF	19	17	2	3 G	2.5	2,0 KW @ 230V	3,0 KW @ 230V	11.5	NO	750	RUBBER (H07RN-F)

OVERALL DIMENSIONS

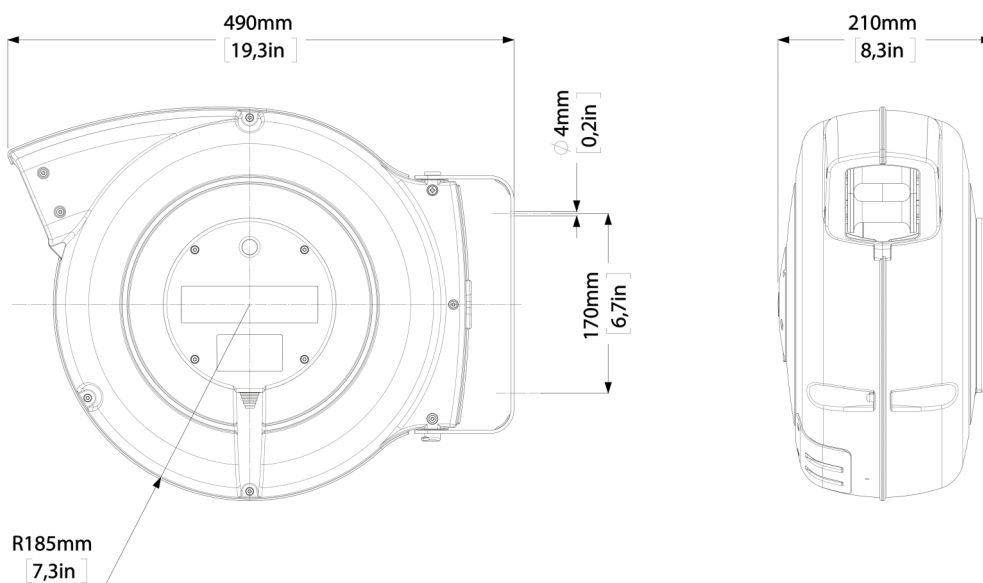

Technical features

Structural elements of the winder in impact-resistant plastic.

- Roller cable guide mouth.
- Cable stop device with rack that can be inserted every 50cm. All cable reels are supplied with the cable stop device disconnected. Easily insertable.
- Double ground contact.
- Collector insulation voltage 2.5 KV.
- Sliding contacts with collector ring and brushes.
- Degree of protection IP42.
- Ambient operating temperature -5 ° C / + 50 ° C.
- Supplied without piece on the power supply side.
- Models with both PVC and rubber cables are available.

Optional

ART. 949/805-7000

for winder 7000

Optional device to make the hose reel fixed instead of swiveling.

Indispensable for ceiling application.

SAFETY RETURN

ART. 7000/SR

Safety return for Series 7000

Safety Return allows the slow rewinding of the cables avoiding dangerous backlashes in case the cable gets out of hand to the operator. Safety Return is an optional braking device for the entire Zeca 7000 series.

Safety Return is an optional braking device for the entire Zeca 7000 series.
AVOID REWINDING

